

Thermonet DUO

10 + 20w/lm

Thermonet Duo - Trade is designed for use internally with countless heating applications. Pre-spaced clip rails ensure that the system can be used in many applications such as screed (20W/LM) or raised timber (10W/LM).

Available in many outputs designed to suit each application, Thermonet Duo in a sand/cement screed can be used in conjunction with off peak electricity tariffs to provide a very cost effective heating solution.

Thermonet DUO 10w/lm

STOCK NUMBER	LENGTH (M)	HEAT OUTPUT (WATTS)	EX VAT
3102	21	210	111.40
3104	42	420	160.90
3109	89	890	279.72
3110	104	1040	365.76
3115	150	1500	427.50
3120	198	1980	563.60

Thermonet DUO 20w/lm

STOCK NUMBER	LENGTH (M)	HEAT OUTPUT (WATTS)	EX VAT
3203	15	300	94.06
3204	23	460	112.30
3206	30	600	131.20
3208	40	800	170.50
3210	51	1020	203.58
3212	62	1240	225.26
3215	74	1480	264.14
3219	96	1920	292.50
3221	106	2120	317.60
3224	123	2460	360.10
3228	140	2800	402.65
3235	176	3520	509.86

Features

- PROVEN QUALITY, FUNCTION AND SAFETY
- ULTRA ROBUST
- INDIVIDUALLY TESTED TO 5000 VOLTS
- ZERO MAINTENANCE HEATING SYSTEM
- 20 YEAR GUARANTEE




FOR THERMOSTATS

SEE PAGE 14

Accessories


STOCK NUMBER	DESCRIPTION	EX VAT
3258	Cable Fixing Profile (2m)	5.86
3031	Cable Staple 26mm (pk 100)	13.52
3131	Supafix Cable Staple Gun	598.20
3225	Edge Insulation Strip (50m roll)	32.90
3226	Cable Channel and Cover	3.86

cable kits

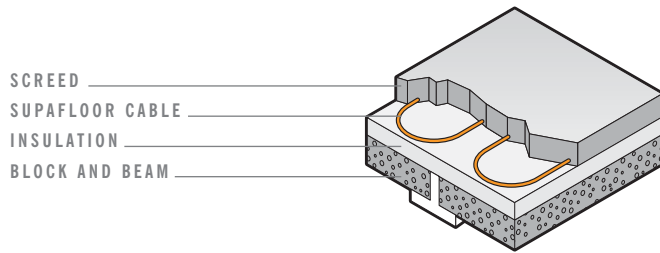


BLOCK AND BEAM

Supafloor underfloor heating to be embedded within floor screed laid over pur foil faced rigid foam insulation.

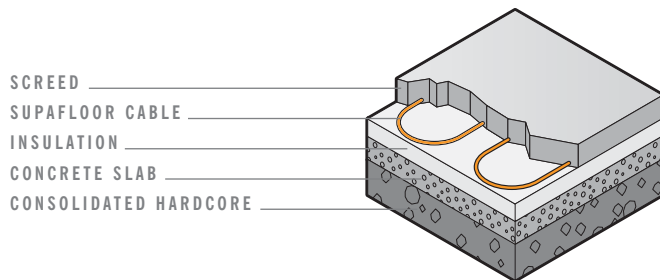


CONCRETE SLAB

Supafloor underfloor heating to be embedded within floor screed laid over pur foil faced rigid foam insulation.

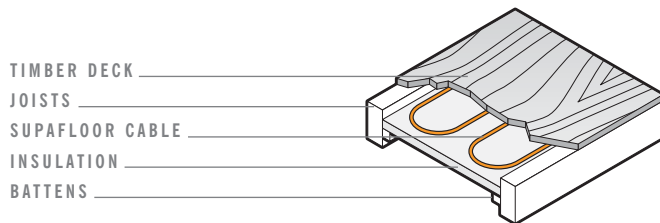

SUSPENDED TIMBER FLOOR

18mm flooring grade timber deck fixed to timber joists.
Supafloor underfloor heating laid over minimum 25mm pur foil faced rigid foam insulation supported between joists by timber battens maintaining 25mm air space above insulation.

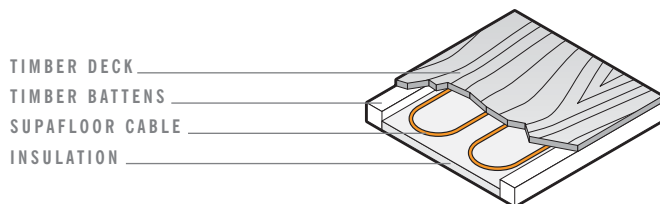

TIMBER BATTENED FLOOR

18mm flooring grade timber deck fixed to timber battens.
Supafloor underfloor heating laid over minimum 25mm pur foil faced rigid foam insulation maintaining 25mm air space above insulation.

